

Style



Luminous digital clocks

Bordet

Technical features

Style

Common features

- Power supply: 230V -10% 50/60Hz.
- Brightness setting on 4 levels.
- Automatic pre-programmed summer/winter time changeover.
- Large viewing angle filter.
- Time basis accuracy 0.2 sec/day - Absolute with radio antenna.
- Silent operation.
- Programming and time setting through two buttons.
- Viewing angle: 120°.

Style 5/7 features

- Injected ABS casing (fireproof) - Matt black.
- Data back-up for 7 days in case of power failure.
- 12 or 24 hours display mode.
- Perpetual calendar.
- Operating temperature : -5 to +50°C.

Style 12 features

- Aluminium casing - Matt black.
- Data back-up for 3 days in case of power failure.
- Red or Yellow high brightness LED providing perfect outdoor reading.
- Manual adjustment of brightness on 4 levels for indoor clock. Automatic adjustment of brightness through photo cells for outdoor clock.
- Automatic adjustment of brightness through photo cells for outdoor clock.

LED colours



Style 5 range, 5-cm display



Style 5

Display: hour minute or alternating with date or week number

Style 7 range, 7-cm display



Style 7

Display: hour minute or alternating with date or week number.

Style 12 range, 12-cm display



Style 12

Display: hour minute or alternating with date or week number.
 Option: temperature to display a and temperature

World *Style* range, 5-cm display



WorldStyle 4 cities

	STYLE 5	STYLE 5 S
Digit height (mm)	50 mm	50 mm
Viewing Distance (m)	20	20
Weight (kg)	0,8	1,1
Protection index	IP 30	IP 30
Power (W)	9,2	12,7

Style 5 S

Display: hour minute second
 Option: timer control unit with clock/time and count-up/count-down switches for remote control of the clock in operating theatres, recording studios...



Style 5 date

Display: hour minute
 Multilingual calendar
 Possibility to alternate 2 languages among 14.
 Perpetual calendar



Style 7 date

Display: hour minute date
 Multilingual calendar
 Day of the week, week number or day number (1 to 365)
 Possibility to alternate 2 languages among 14
 Perpetual calendar.



Style 7 Ellipse

Display: hour minute and sweep second or alternating with date or week number.



Style 12 S

Display: hour minute second
 Option: timer control unit with clock/time and count-up/count-down switches for remote control of the clock in operating theatres, recording studios...



Multi time zone display clock

Display: hour minute
 Choice of city text
 Local times programmed in factory and modifiable on site.
 Automatic time changeover.



WorldStyle 6 cities

	STYLE 5 DATE	STYLE 7	STYLE 7 DATE	STYLE 7 ELLIPSE	STYLE 12	STYLE 12 S	WORLD STYLE 4 V	WORLD STYLE 6 V
	50 mm	Digit 70 mm	Digit 70 mm Letter 50 mm	Digit 70 mm	125 mm	125 mm	70 mm	70 mm
	20	25	25	25	50	50	25	25
	1,6	1,1	2,1	2,2	5	6,3	12	18
	IP 30	IP 30	IP 30	IP 30	Indoor : IP 51 Outdoor : IP 53	Indoor : IP 51 Outdoor : IP 53	IP 41	IP 41
	23	15	34,5	18,4	12,4	19,5	36,8	55,2

Operation : Independent or impulse receiver
 Radio synchronised by France Inter or DCF (except Style 5 range)
 AFNOR receiver
 DHF receiver



Options

For Style 5S / 12S




- BT Chrono ref. : 936400**
 Elapsed time control unit (hour minute second)
 Count-up and down operation
 Split time
 For hospitals, recording studios, sportshalls...
 Supplied with a 5-m cable (Max. length 20m.).

For Style 12



- Temperature probe ref. : 935011**
 Supplied with a 5-m cable.

Dimensions (mm)

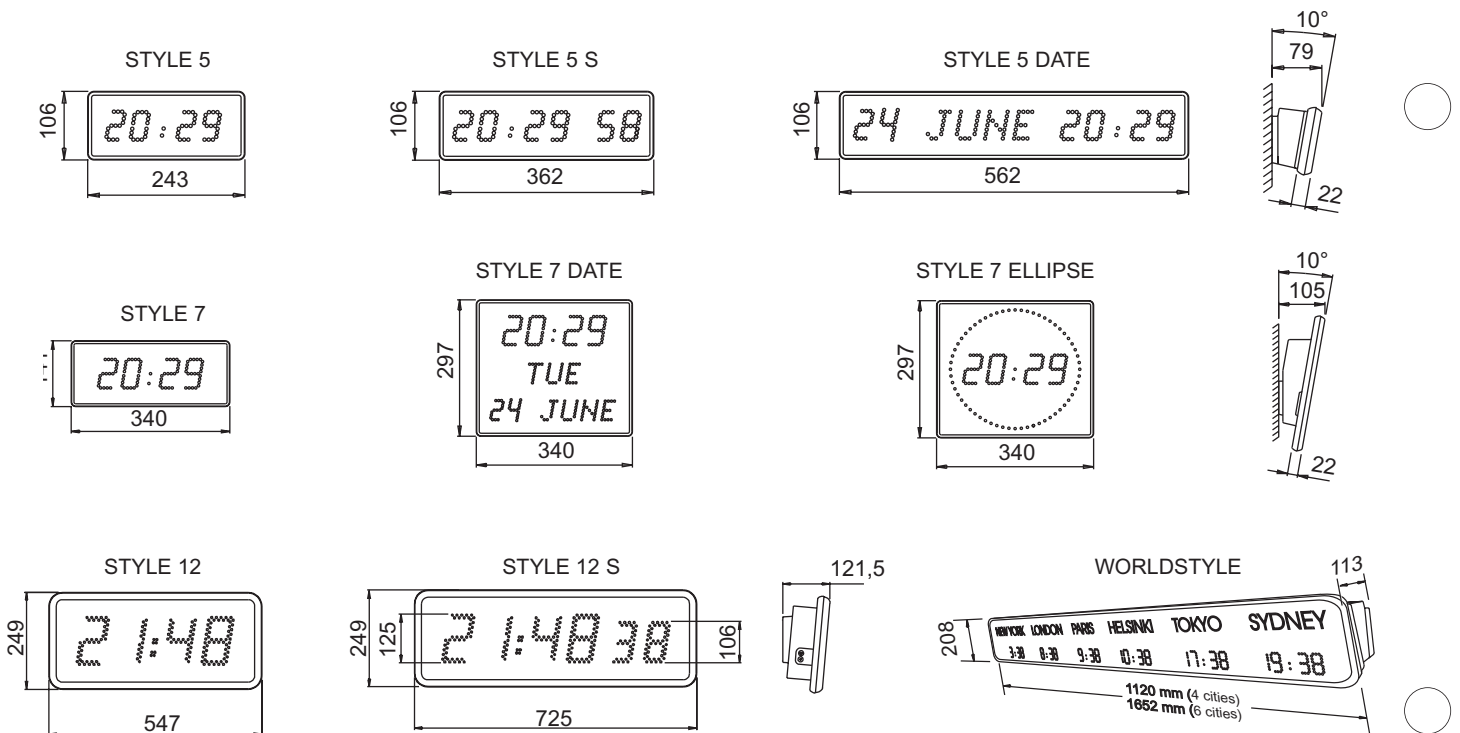

Mounting

